

### MAINSAIL REQUIREMENTS

Max. Sail Dimensions:

LUFF	21'-0"	(6401)
FOOT	12'-3"	(3734)
LEECH	23'-3"	(7087)
GIRTH	7'-10"	(2388)
HEADBOARD	0'-6"	(152)


MAINSAIL MUST BEAR 12", (305) MIN. NUMERALS OF BOAT NO. AND INSIGNIA ON BOTH SIDES OF SAIL.

MAINSAIL MUST HOIST ON CONVENTIONAL TRACK OF METAL MAST AND BOOM BY SAIL BOLT ROPE IN THE THROATED EXTRUSION

SAILS MUST BE OF WOVEN FABRIC 3.8oz.. (0.1288 Kg/m<sup>2</sup>)<sup>2</sup> (MIN. WT.) PER SQ. YD.. (0.1288 Kg/m<sup>2</sup>)<sup>2</sup> METER. WINDOWS ALLOWED UP TO 3 SQ.FT.; 0.28 SQ. METER.

ZIPPERS ARE NOT ALLOWED

UPPER AND LOWER BATTENS ARE 30", (762) LONG. INTERMEDIATE BATTEN IS 36", (914) LONG.

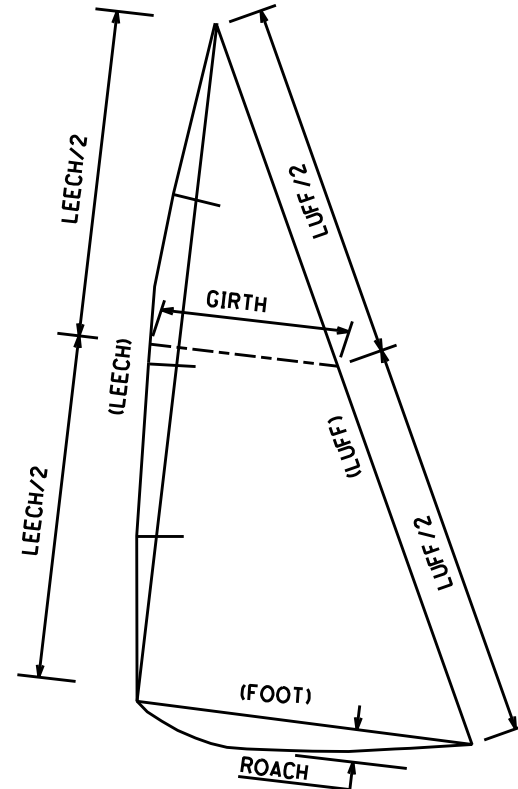

### JIB REQUIREMENTS

Max. Sail Dimensions:

LUFF	16'-0"	(4877)
FOOT	7'-0"	(2134)
LEECH	14'-4"	(4369)
GIRTH	4'-2 <sup>1</sup> / <sub>2</sub> "	(1283)

JIB BATTENS NOT TO EXCEED 12", (305)  
 BATTEN MATERIAL IS OPTIONAL FOR ROLLING FURLER JIB  
 ROACH ON FOOT NOT TO EXCEED 9", (229)  
 FROM STRAIGHT LINE JOINING TACK AND CLEW.

WIRE ROPE LUFF <sup>3</sup>/<sub>32</sub>", (2.4) MIN. DIA.

SAIL MUST BE OF WOVEN FABRIC 3.8oz.. 0.52kg (MIN. WT.) PER SQ. YD.. (0.1288 Kg/m<sup>2</sup>)<sup>2</sup>

WINDOWS ARE ALLOWED UP TO 2 sq.ft. (0.19m<sup>2</sup>)<sup>2</sup>

INTERLAKE SAILING CLASS  
 ASSOCIATION  
 SAIL PLAN

SHT. #

12/13

DATE

JUNE 2004

DWG: CHK TK