


Dimensions:

a	16 1/4"	(413)
b	15"	(381)
c	8 1/2"	(216)
d	10"	(254)
e	5"	(127)
f	17 1/2"	(446)

TABLE OF DIMENSION TOLERANCES		
SALES & EQUIPMENT	UNDER	OVER
LINEAR TOLERANCES ON SAIL DIMENSIONS	100%	NONE
BATTEN LENGTHS	100%	NONE
LINEAR TOLERANCES MAST AND BOOM	5%	NONE
MAST AT DECK	4"(102)	4"(102)
JIBSTAY MAY BE SHIFTED FORE OR AFT	2"(51)	2"(51)
SIDESTAY (VERTICAL MEASUREMENT)	1/2"(13)	1/2"(13)
CHAIN PLATES	1"(25)	1"(25)
CENTER BOARD LENGTH AND WIDTH	1"(25)	NONE

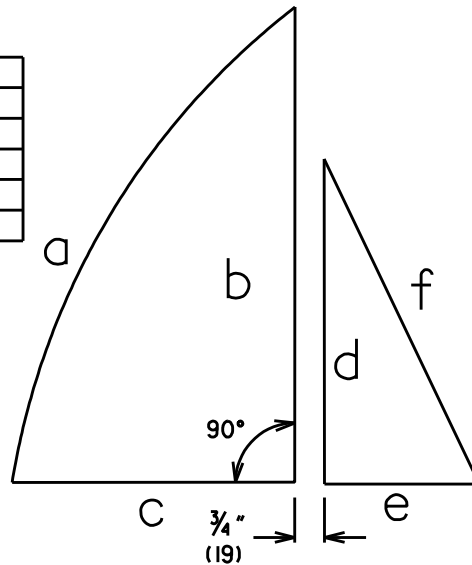

OFFICIAL INSIGNIA
(NOT TO SCALE)

INSIGNIA TO BE LOCATED BETWEEN UPPER AND MIDDLE BATTEN OF MAIN SAIL


SPINNAKER REQUIREMENTS

Dimensions:

1 TO 2	17'-6"	(5334)	1 TO 7	19'-6"	(5944)
1 TO 3	18'-6"	(5639)	2 TO 7	5'-9"	(1753)
1 TO 4	18'-6"	(5639)	3 TO 4	5'-9"	(1753)
1 TO 5	18'-6"	(5639)	2 TO 5	6'-9"	(2057)
1 TO 6	19'-6"	(5944)	3 TO 6	6'-9"	(2057)

METHOD OF MEASUREMENT:

WITH SPINNAKER FOLDED ALONG ITS CENTER SEAM, PLACE SEAM AND LEECH INTERSECTION ON POINT I. PLACE LEECH AND FOOT INTERSECTION ON LINE 2-3. THIS INTERSECTION MUST LIE BETWEEN POINTS 2-3 (NO PULL). WITH THE CLOTH SMOOTHED (NO PULL), THE CENTER SEAM AND FOOT INTERSECTION MUST LIE WITHIN THE AREA 4-5-6-7. BY USE OF A STRAIGHT EDGE MEASURE A-B THE INTERSECTION OF THE LEECH AND THE CENTER SEAM WITH THE 6'-0" (1829) RADIUS SWING FROM THE CENTER POINT I. THE DIMENSION A-B ALONG THE CORD MUST BE BETWEEN 5'-0" (1524) AND 5'-11" (1803). BY THE SAME METHOD MEASURE THE CORD C-D WITH A 12'-0" (3658) RADIUS. THIS DIMENSION MUST BE BETWEEN 6'-5" (1956) AND 6'-11" (2108). HULL NUMBERS 10" (254) HIGH MUST BE CENTERED ON THE SAIL AND DISPLAYED ON BOTH SIDES.

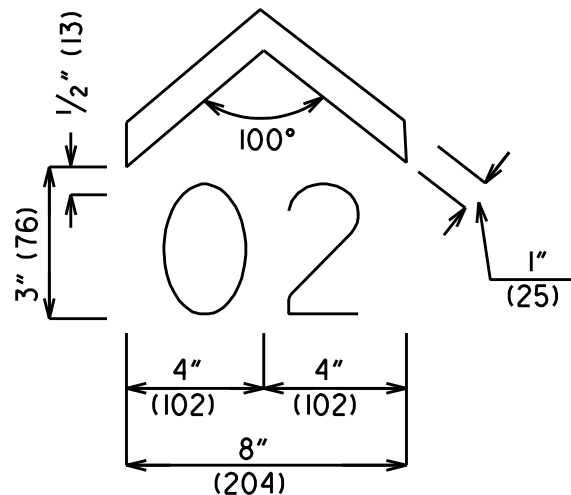

HONOR AWARDS

(NOT TO SCALE)

FIRST PLACE - THREE CHEVRONS
SECOND PLACE - TWO CHEVRONS
THIRD PLACE - ONE CHEVRON

INTERLAKE SAILING CLASS
ASSOCIATION
SPINNAKER PLAN & INSIGNIA DETAILS

SHT. #
13/13

DATE
JUNE
2004

DWG:
CHK
TK